

Double Flanged Non-Slam, Resilient Seated Swing Check Valve



Design:

- Backward flowing is effectively stopped at low pressure different.
- Functionable when install horizontally or vertically.
- Anti-blow off disc design.
- Resilient Seat provided drop tight closure.
- Low head loss.
- Minimum space consumption due to compact valve design.
- Maintenance free.

Applicable for:

Drinking Water, Seawater, Sewage Irrigation, Industrial & Fire Line




Technical Specification:

Standard : BS EN 12334: 2001
 Nominal Size : DN 80 – DN 400
 Nominal Pressure : PN 16
 Drilling Flange : BS EN 1092-2, PN16
 Protection : Fusion Bonded Epoxy
 Working Temperature : Maximum 70°C



Material Specification:

No.	Component	Reference Standard
1.	Bolt	Stainless Steel, BS 970-1, 304S31
2.	Cover	Ductile Iron, BS EN 1563, EN-GJS-500-7
3.	Gasket	EPDM, BS EN 681-1, Type WA
4.	Body	Ductile Iron, BS EN 1563, EN-GJS-500-7
5.	Stem	Stainless Steel, BS 970-1, 304S31
6.	Hinge	EPDM, BS EN 681-1, Type WA
7.	Soft Seal	EPDM, BS EN 681-1, Type WA
8.	Disc	Ductile Iron, BS EN 1563, EN-GJS-500-7

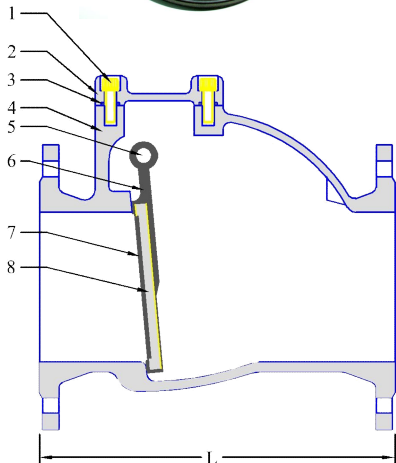

Dimension Specification (mm):

DN	80	100	150	200	250	300	350	400
L	241	292	356	495	622	698	787	914



Product has been listed with



TPLI INDUSTRIES SDN BHD

PLOT 30 – 32, JALAN LOGAM 1,
 KAWASAN PERINDUSTRIAN KAMUNTING III,
 34600 KAMUNTING,
 PERAK DARUL RIDZUAN,
 MALAYSIA.

MARKETING OFFICE
 TEL : (605) – 8958001/2
 FAX : (605) - 8958000
 EMAIL : tplimc@gmail.com
 WEBSITE : <http://www.tpli.com.my>

